


DATASHEET

MAGNETIC DRIVE CENTRIFUGAL PUMP

CMTP031

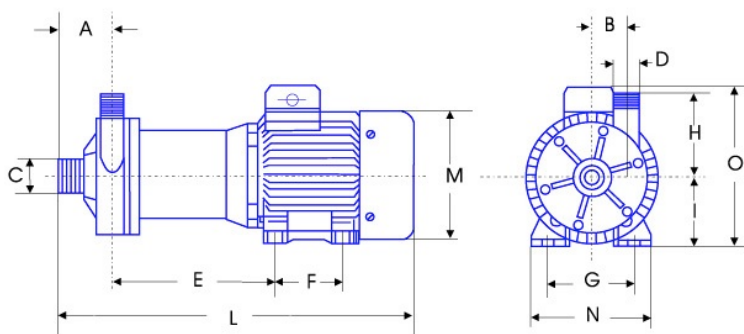

CMTP031

Dimensioni/Dimensions													Motore/Motor				Peso/Weight
A	B	C	D	E	F	G	H	I	L	M	N	O	MEC	Flangiate/ Bracket	WATT	PHASES	KG
34	30	1/2"	1/2"	115	71	90	63	56	279	110	112	150	56	B3-B14	90	1	**2,950

** Varia in rapporto ai materiali ** It changes according to the materials

TECHNICAL SPECIFICATIONS:

MATERIAL OF PUMP: available PP or PVDF

MOTOR: B3-B14 / Kw 0,09 / 1 phases

MOTOR BEARING: not provided

MAX CAPACITY: 30 l/min.

MAX HEAD: 5 m.

(Data at 50Hz, test carried with water at room temperature –
See Curve References Table)

WARNINGS:

- Do not allow the pump to run dry.
- Dirty liquids may reduce the working life of the pump.
- It is recommended to install the pump in horizontal position, under head and with outlet upwards.

Product compliant with Directive 2006/42/CE

CMTP031

50 Hz-60Hz

